


# DYCW Weighing Modules

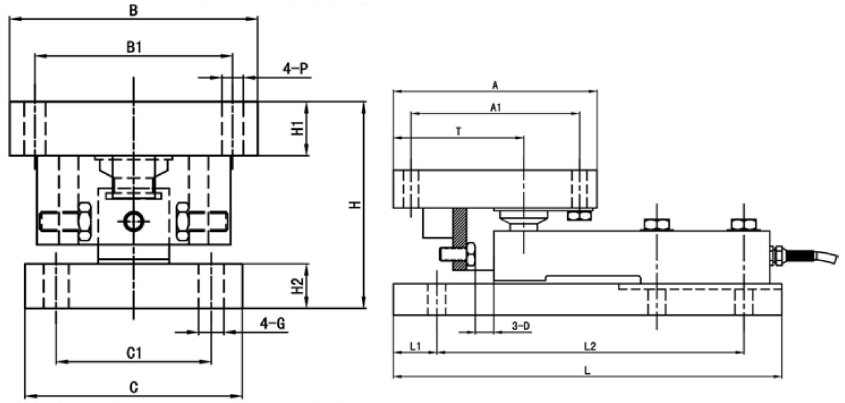

## Product Reviews

### Characteristic

Self-stabilizing pressure head design, always maintain the correct loading position, weighing repeatability. High quality alloy steel, surface nickel plating treatment explosion-proof applica-

tion occasions, stainless steel material optional maintenance is convenient, save shutdown maintenance time.

### Application Area

- Platform Weighing Scale
- Truck Scale
- Orbital Ground Pound
- Barster, storage tank, bucket tank scale and other weighing equipment.

Parameters Table

Range	0-20T	Material quality	Stainless Steel/Alloy Steel
Output sensitivity	2.0±0.002mV/V	Impedance	350Ω
Zero point output	±2%F.S.	Insulation resistance	≥5000MΩ/100VDC
Nolinear	0.03%F.S.	Service voltage	5-15V
Hysteresis	0.03%F.S.	Operating temperature range	-20-80°C
Repeatability	0.03%F.S.	Safe overload	150%
Creep (30 min)	0.03%F.S.	Extreme overload	200%
Temperature sensitivity drift	0.02%F.S./10°C	Cable line specifications	φ5x2m
Xero point temperature drift	0.02%F.S./10°C	Cable limit tension	10kg
Response frequency	10kHz	TEDS	

Range (T)	L	L1	L2	A	A1	B	B1	C	C1	H	H1	H2	T	P	G	D
0.3/0.5/1/2/3	286	32	226	150	124	128	102	112	80	106.9	28	23	96	M10	φ13	1.6
5-8	317.5	32	257	178	146	152	120	152	102	146.2	38	30	99	M16	φ17	1.6
10	360	32	295	184	152	154	122	154	106	215.7	45	45	105	M20	φ21	3
15,20	400	25	350	220	170	220	170	220	170	255.7	55	55	115	M24	φ26	3